



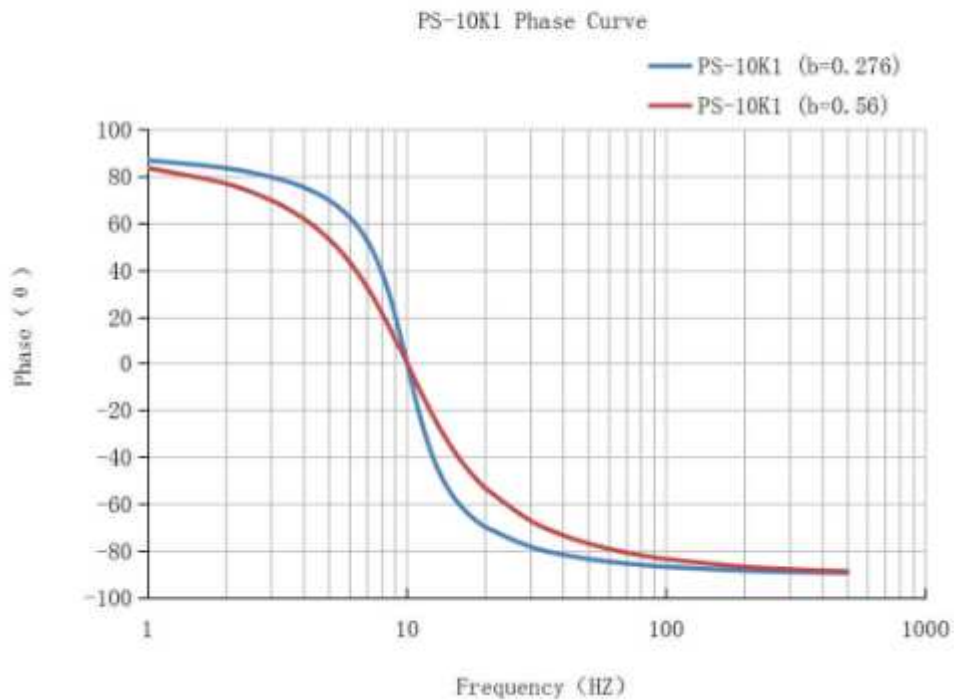

PS-10K1 GEOPHONE MAIN SPECIFICATIONS

PS-10K1	
Parameter/mode	PS-10K1 (20°C)
Natural Frequency (Hz)	$10 \pm 8 \%$
Coil Resistance (Ω)	$1625 \pm 5\%$
Sensitivity (V/m/s)	$36.3 \pm 10\%$
Sensitivity With Shunt Resistor (V/m/s)	$20 \pm 10\%$ (2000 Ω)
Open circuit damping	$0.276 \pm 10\%$
Damping with Shunt Resistor	$0.56 \pm 10\%$ (2000 Ω)
Distortion (%)	≤ 0.6
Max. Motion (mm)	2
Moving Mass (g)	10.2
Dimensions (dxh) mm	25.4 x 36
Temperature Range (°C)	-40° to 70°C
Warranty Period(Year)	2
Weight (g)	74.7

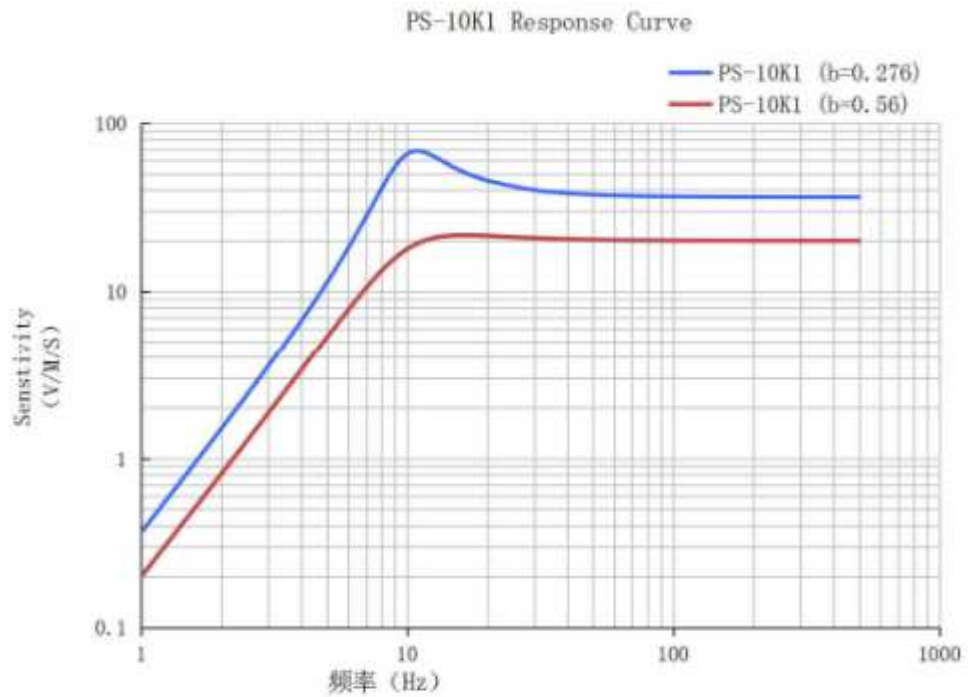

CONTACT

Netherlands - The Hague
Diederik Schrijvers
Mobile: +31 6 4132 9010
Email: diederik@vibraphone.nl
Website: vibraphone.nl

