




PS-10K2 GEOPHONE MAIN SPECIFICATIONS

PS-10K2	
Parameter/mode	PS-10K2 (20°C)
Natural Frequency (Hz)	$11 \pm 7.5\%$
Coil Resistance (Ω)	$580 \pm 5\%$
Sensitivity (V/m/s)	$26.5 \pm 6\%$
Sensitivity With Shunt Resistor (V/m/s)	$20.5 \pm 6\%$ (2000 Ω)
Open circuit damping	$0.39 \pm 7.5\%$
Damping with Shunt Resistor	$0.59 \pm 7.5\%$ (2000 Ω)
Distortion (%)	≤ 0.9
Max. Motion (mm)	2
Moving Mass (g)	9.7
Dimensions (dxh) mm	25.4 x 36
Temperature Range (°C)	-40° to 70°C
Warranty Period(Year)	2
Weight (g)	74.7

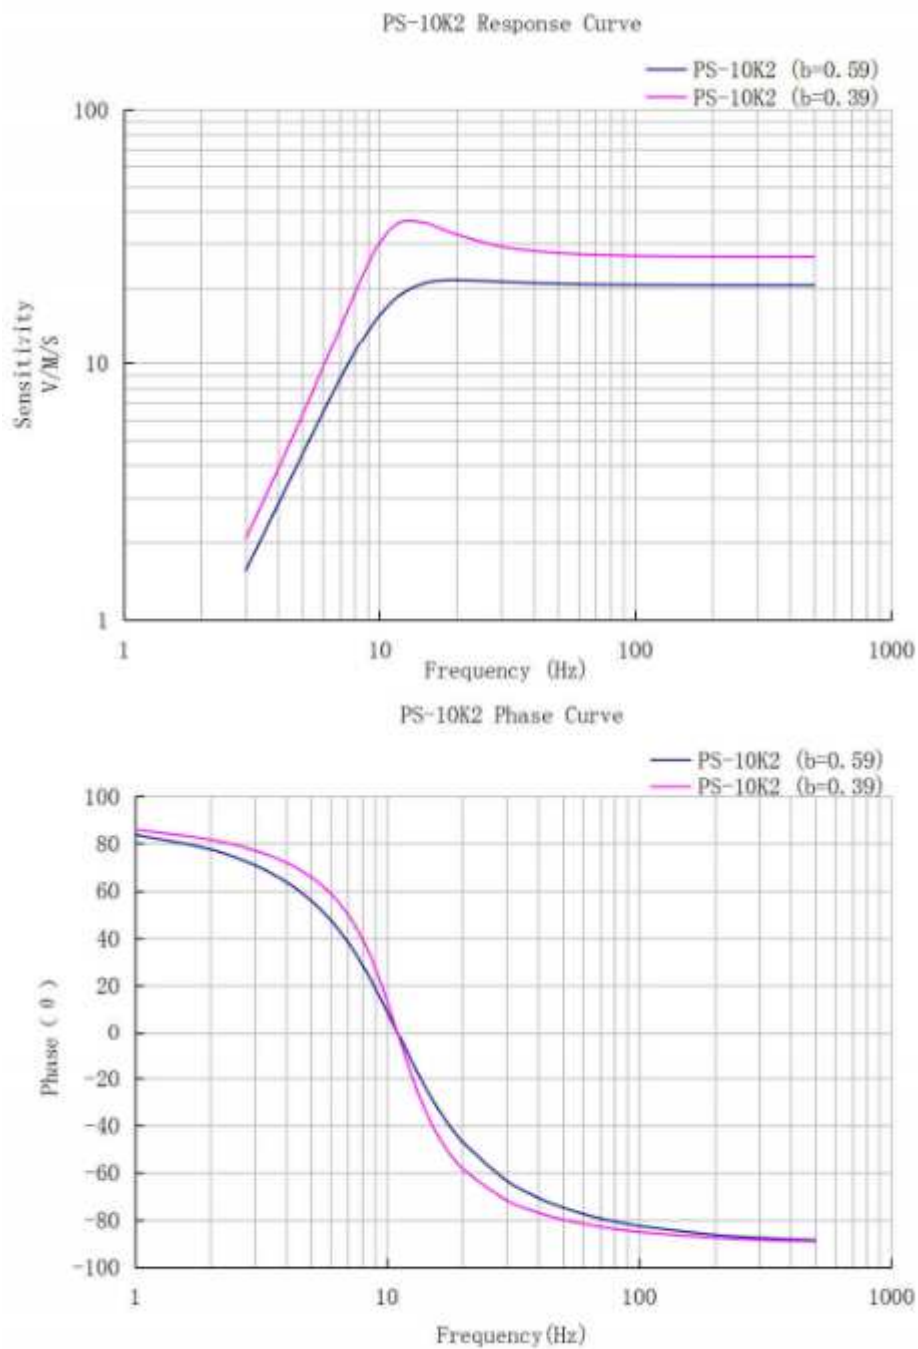

CONTACT

Netherlands - The Hague
Diederik Schrijvers
Mobile: +31 6 4132 9010
Email: diederik@vibraphone.nl
Website: vibraphone.nl

