




PS-10K5 GEOPHONE MAIN SPECIFICATIONS

PS-10K5	
Parameter/mode	PS-10K5 (20°C)
Natural Frequency (Hz)	$11.2 \pm 7.5\%$
Coil Resistance (Ω)	$2315 \pm 5\%$
Sensitivity (V/m/s)	---
Sensitivity With Shunt Resistor (V/m/s)	$50 \pm 5\%$ (9100 Ω)
Open circuit damping	---
Damping with Shunt Resistor	$0.58 \pm 7.5\%$ (9100 Ω)
Distortion (%)	≤ 0.9
Max. Motion (mm)	2
Moving Mass (g)	10.4
Dimensions (dxh) mm	25.4 x 36
Temperature Range (°C)	-40° to 70°C
Warranty Period(Year)	2
Weight (g)	74.7

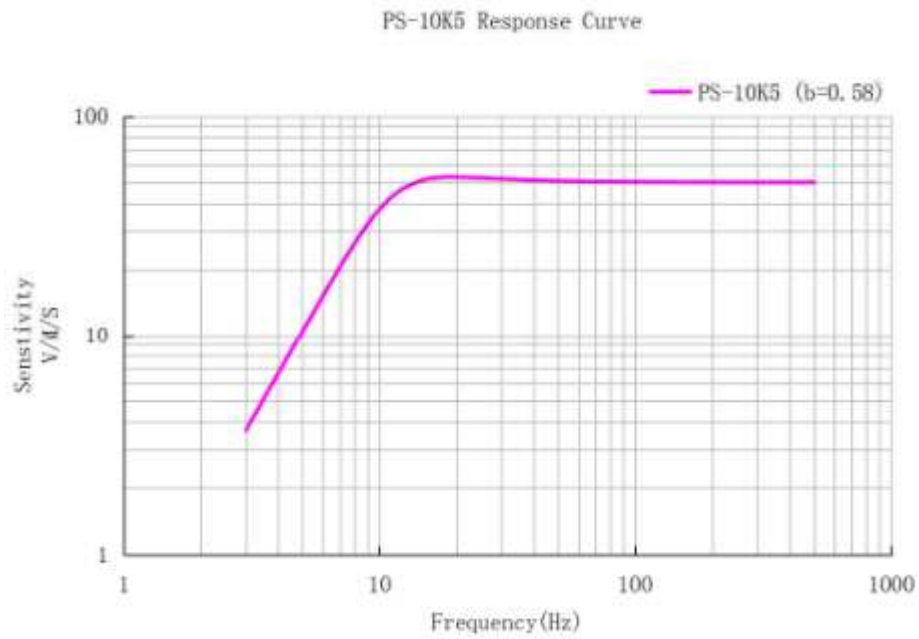

CONTACT

Netherlands - The Hague
Diederik Schrijvers
Mobile: +31 6 4132 9010
Email: diederik@vibraphone.nl
Website: vibraphone.nl

