



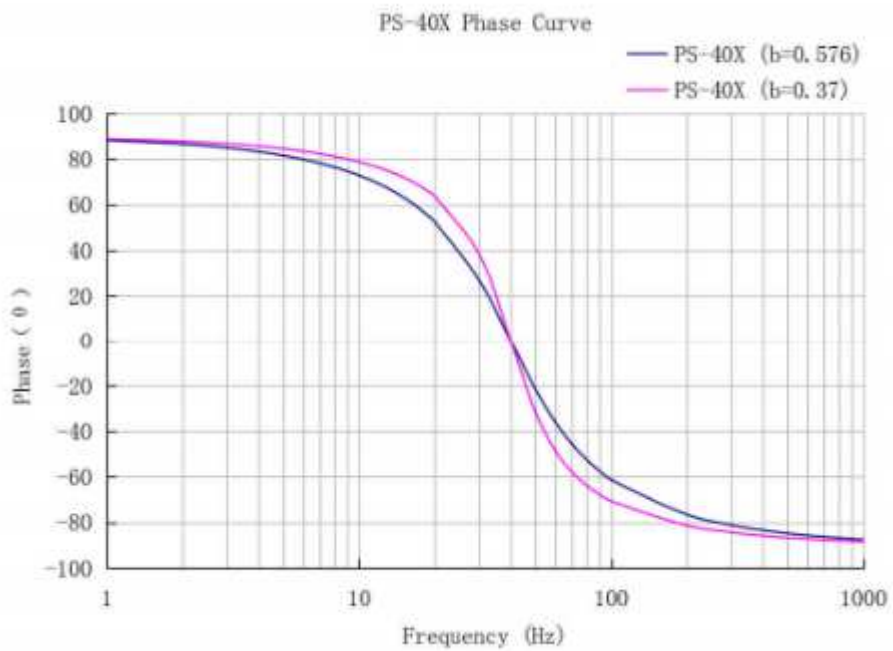

## PS-40X GEOPHONE MAIN SPECIFICATIONS

PS-40X	
Parameter/mode	PS-40X (22°C)
Natural Frequency (Hz)	40 ± 0.5 %
Coil Resistance (Ω)	575 ± 5%
Sensitivity (V/m/s)	42 ± 5%
Sensitivity With Shunt Resistor (V/m/s)	30.4 ± 5% (1500 Ω)
Open circuit damping	0.37 ± 5%
Damping with Shunt Resistor	0.576 ± 5% (1500 Ω)
Distortion (%)	≤0.2
Spurious Frequency (Hz)	≥ 380
Max. Motion (mm)	1.5
Moving Mass (g)	8.2
Dimensions (dxh) mm	27 x 34
Temperature Range (°C)	-40° to 70°C
Warranty Period(Year)	3
Weight (g)	98

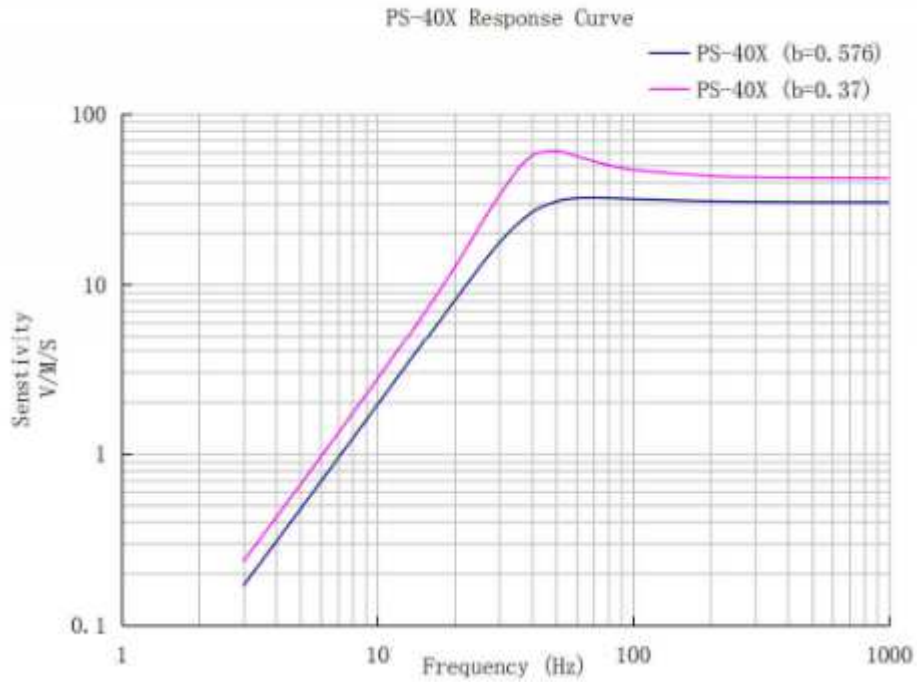

**CONTACT**

Netherlands - The Hague  
 Diederik Schrijvers  
 Mobile: +31 6 4132 9010  
 Email: [diederik@vibraphone.nl](mailto:diederik@vibraphone.nl)  
 Website: [vibraphone.nl](http://vibraphone.nl)

