



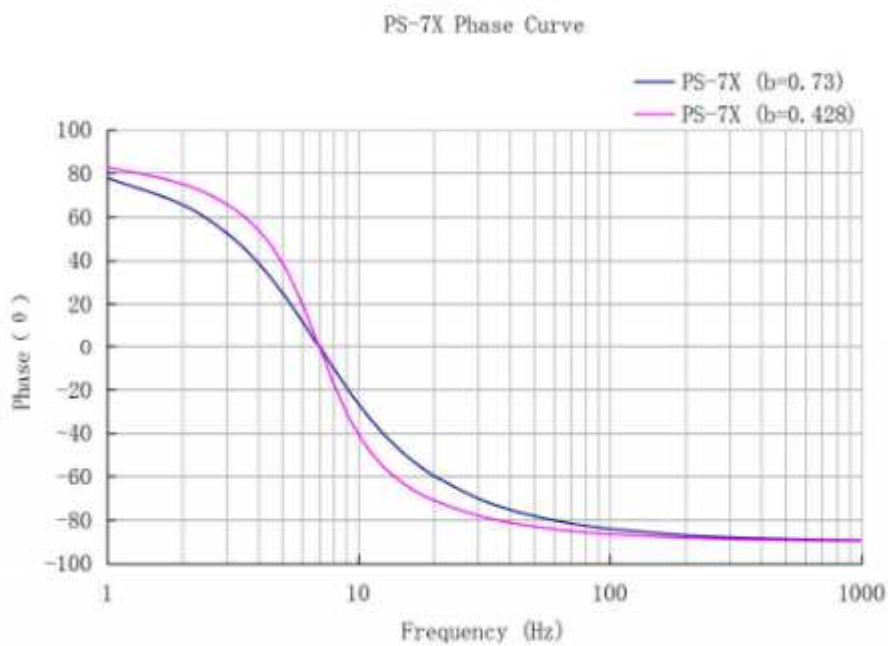

PS-7X GEOPHONE MAIN SPECIFICATIONS

PS-7X	
Parameter/mode	PS-7X (22°C)
Natural Frequency (Hz)	$7 \pm 0.5 \%$
Coil Resistance (Ω)	$395 \pm 5\%$
Sensitivity (V/m/s)	$28.6 \pm 5\%$
Sensitivity With Shunt Resistor (V/m/s)	$28.6 \pm 5\%$ (2400 Ω)
Open circuit damping	$0.428 \pm 5\%$
Damping with Shunt Resistor	$0.73 \pm 5\%$ (2400 Ω)
Distortion (%)	≤ 0.3
Spurious Frequency (Hz)	≥ 180
Max. Motion (mm)	1.5
Moving Mass (g)	11
Dimensions (dxh) mm	25.4 x 34
Temperature Range (°C)	-40° to 70°C
Warranty Period(Year)	2
Weight (g)	87.3

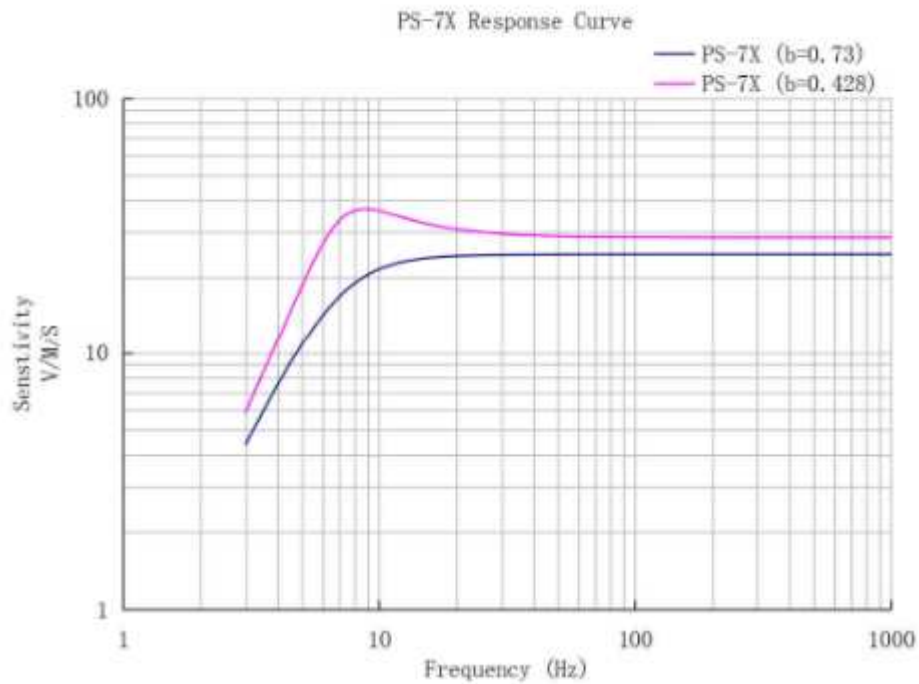

CONTACT

Netherlands - The Hague
Diederik Schrijvers
Mobile: +31 6 4132 9010
Email: diederik@vibraphone.nl
Website: vibraphone.nl

